

QUICK GUIDE

Setting up your PTT Voice Responder to work with Kodiak-based apps (iOS) (EN)



NOTE! Follow this guide if you are using one of the following applications:

AT&T Enhanced Push-to-Talk, Bell Next-Generation Push-to-Talk, MIRS 4G PTT, KPN Push-to-Talk, Movistar Push-to-Talk, Sprint Direct Connect Plus, Telefónica Push-to-Talk, Tigo Push-to-Talk, Verizon Wireless Push-to-Talk Plus, Vivo Push-to-Talk, Vodafone Push to Talk, or Ericsson Cloud-based Push-to-Talk.

A

Putting your PTT Voice Responder into Kodiak-mode

1. Turn on the device by pressing the Power button  for more than 3 seconds.
2. Then, perform a software reset by pressing and holding both soft (arrow) buttons and both PTT buttons simultaneously, until the LED blinks once in yellow (this step is necessary to remove any previous pairings and settings).
3. Turn off the device by pressing the Power button  for more than 3 seconds.
4. Activate Kodiak-mode by holding down the Volume-down button, while turning on the device by pressing the Power button for more than 3 seconds. Successful activation is indicated by a purple LED indication instead of the normal power on LED.
5. Finally, put the Voice Responder into Storage mode, by pressing the Power and Emergency button simultaneously; after the beep, first release the Power button and then the Emergency button. Afterwards, you can turn on your device from the Power button as usual.

Step 2. Software reset



Step 4. Toggle Kodiak-mode




B

Pairing your PTT Voice Responder to your iPhone via Bluetooth

1. Turn on your PTT Voice Responder by holding down the Power button  for more than 3 seconds. After it is on, a blinking green light will indicate that the device is ready for pairing.
2. Turn on your iPhone's Bluetooth by going to: Settings → Bluetooth → Turn on.
3. Pair your PTT Voice Responder to your iPhone by selecting it from the Devices list. When the device is in Kodiak-mode, it will appear as 'Kodiak-PTT' on the Bluetooth menu. Once it has successfully paired, a blue light will begin blinking on your device.
4. Once you pair your PTT Voice Responder, another Kodiak-PTT will appear on the Bluetooth Devices list. You will have to pair to this one as well, by (4.1) selecting it, and (4.2) accepting the Bluetooth Pairing Request.

You are ready to use your PTT Voice Responder when you see two 'Kodiak-PTT' devices connected on the Bluetooth menu.

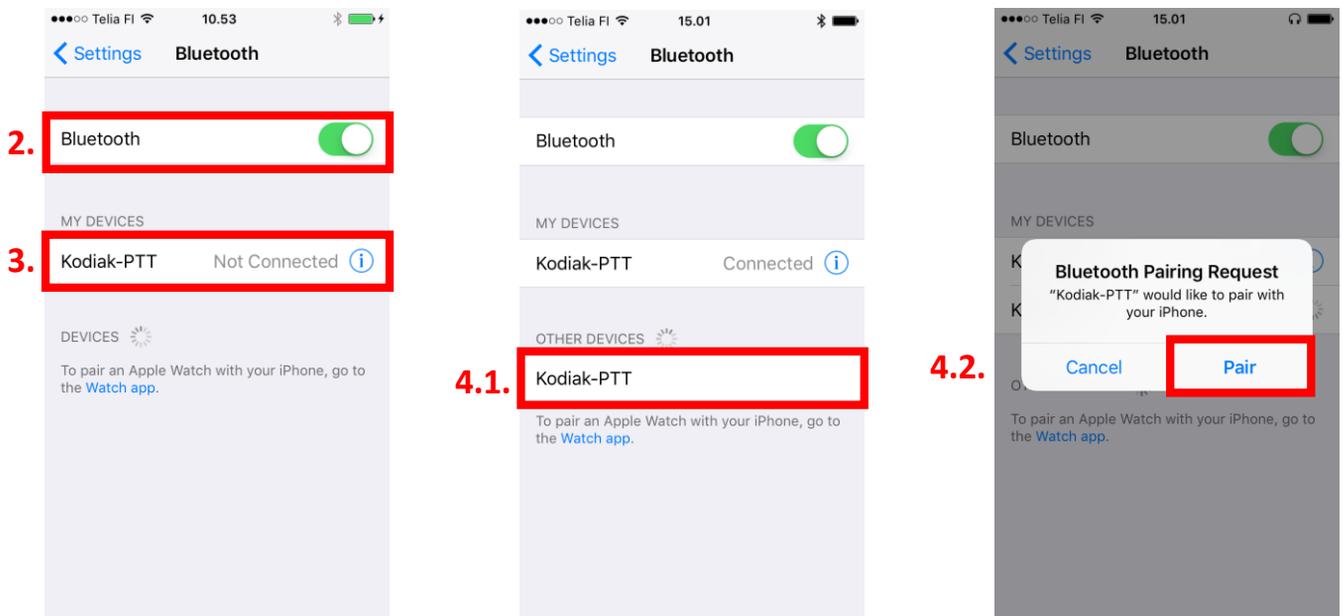

NOTE: The Voice Responder can only be paired with one device at a time. If you want to pair it to another device you need to perform an **Unpairing/ Software reset** by pressing and holding both soft buttons and both PTT buttons simultaneously, until the LED blinks once in yellow.



AINA PTT Voice Responder's main button functions



Button	Function
Power ON/ OFF	Press for more than 3 seconds to turn the device on/off.
Primary PTT	Press and hold to speak. Release when you are done.
Volume buttons	Press and hold to increase/ decrease the speaker's volume.
Soft buttons	<p>These buttons have multiple functions:</p> <ul style="list-style-type: none"> • Press and hold the left soft button to (de)activate the LED. • Press and hold both soft buttons to (de)activate Covert Mode in which the LED indications are suppressed and the audio is only delivered through a headset.

Visit www.aina-wireless.com to find additional accessories, an extended user manual of the AINA PTT Voice Responder and more user guides. If you have any further questions, you can also email us at: info@aina-wireless.com

